


Operation Manual

Wireless Audio Receiver ATG05


Button and the screen of Transmitter :

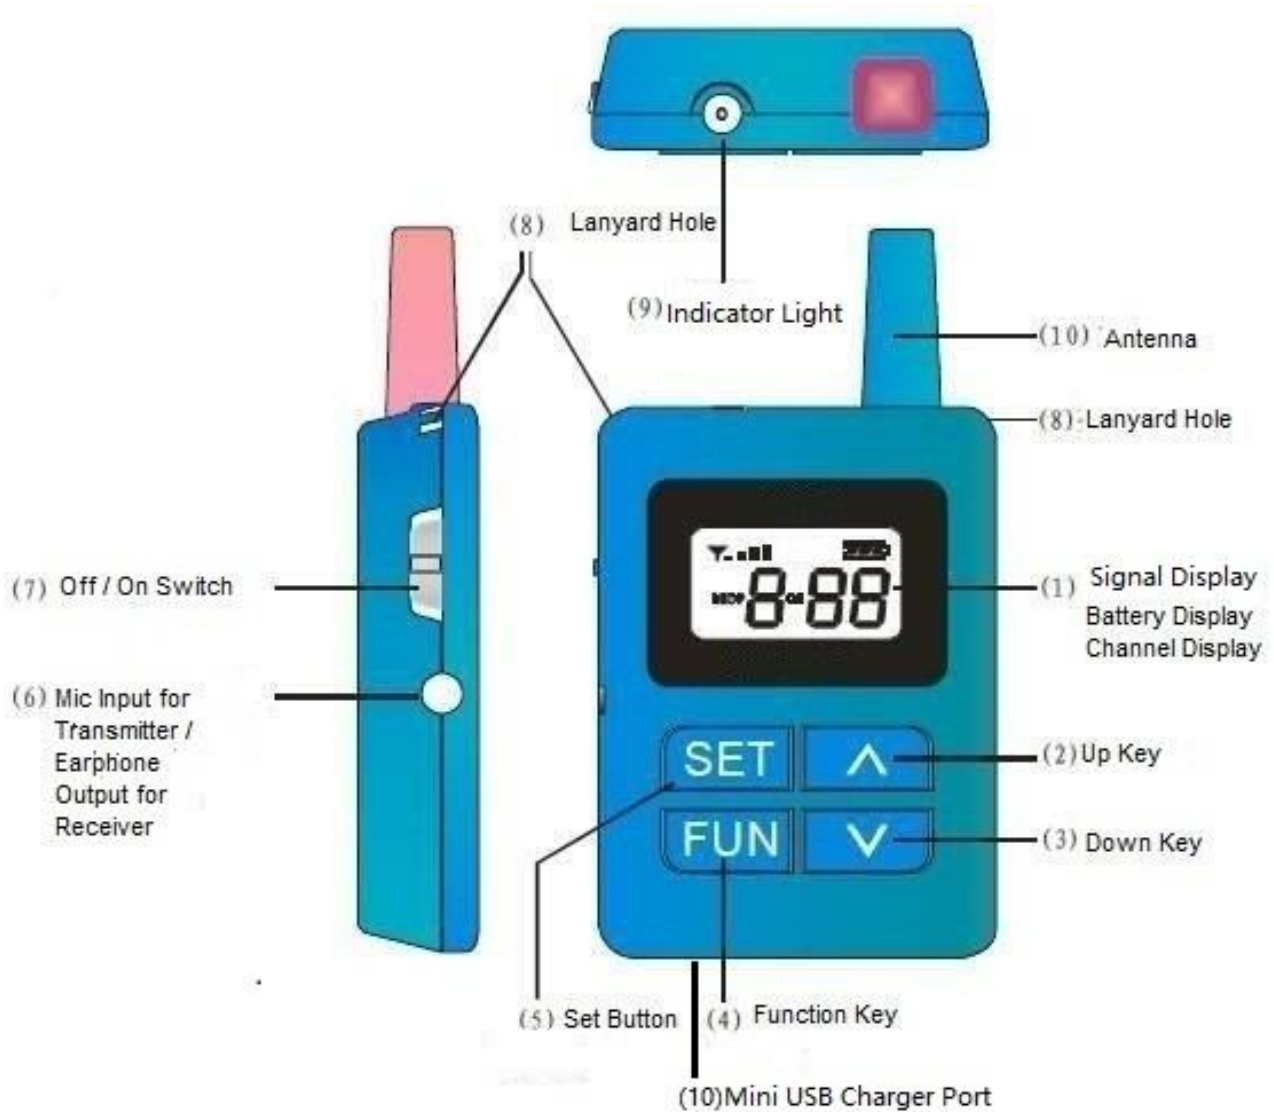

Button and the screen of Receiver:



LCD Display:

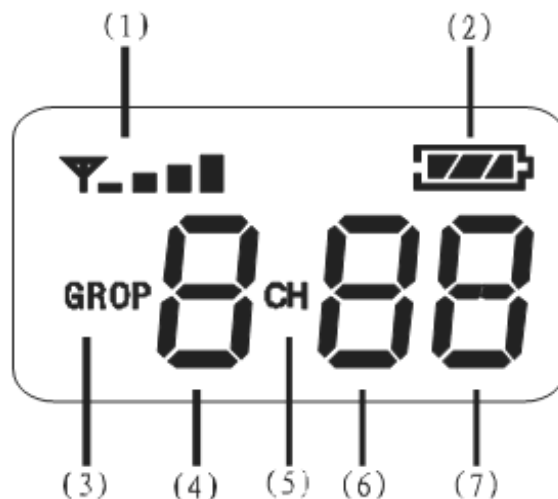

- (1). Signal strength indicator
- (2). Battery level indicator
- (3). Mode of Frequency indicator
- (4). Mode "0" is for 100 channel version; Mode "1" is for 50 channel version ;
(Generally please keep the factory original setting Mode "0", it is no need to change for that.)
- (5). Channel Setting indicator
- (6). Channel display number
- (7). Channel display number

Operation:

1. **Switch On/Off:** Switch up is on, switch down is off. **One digit number on the left screen for volume display and double digit number on the right screen for channel display.**
2. **Transmitter Channel Setting:** When device is switch on, **press the two combination button “FUN” and “∨” at same time until to show the flickering ”CH” to set or change channels**, the display will show Channel number (00-99). When the transmitter and receiver are in the same channel, they will be work.
3. **Transmitter Volume Control:** When transmitter is switch on, use “∧” and “∨” to adjust volume. For example: Choose from 1- 4 will transmit a larger sound for audio data input.
4. **Receiver Change Channel :** When device is switch on, **press combination buttons “ F ”and volume “-” at same time until to show the flickering” CH” to set or change channels**, the display will show Channel number (00-99). **When the transmitter and receiver are in the same channel, they will be work.**
5. **Receiver volume Control:** When receiver is on, use volume“-”and volume“+” to adjust volume. At the same time, the display will show (1-9) volume number.

Manager function of Transmitter: This is additional function for transmitter to manage and set channel for all receivers in the group. Firstly, keep all receivers on the state of turn off, put them all near around the transmitter, we use the transmitter as manager function by using combination button setting (“F” and “Switch on” button), you can use the button “up” and “down” (“∧” and “∨”) for channel setting. When you finished setting the channel on transmitter, turn on all receivers which you need to set channel, you will see they are in same channel with transmitter. And then switch off transmitter and switch on again, the receivers will receive signal, transmitter and receivers in the same channel working mode.

Charging: Please make sure all devices in the state of turn off when charging. The light will be off when charging is finished. Charging time is around 4-5 hours and please avoid over charge. We supply multi charger and charging station for large amount of devices to be charged at the same time.

Specifications:

Distance:	150-200 Meters
Channel:	100 Channels (Customized)
Audio Input:	Microphone/Audio (Line in)
Output:	Earphone/Audio (3.5mm)
Power Supply:	Lithium Battery Build in
Dimension:	100mm X 64mm X 10mm
Weight:	40 Grams Including Batter